

CETA® PC Drippers



A take apart Pressure Compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

Features

- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).
- Three color coded and stamped flow rates - 1/2 gph, 1 gph and 2 gph.
- Large clog resistant turbulent flow path.
- The CETA® dripper is able to be taken apart for inspection and cleaning.
- Self piercing inlet barb with built in filter.
- Insect Baffle to deter insect entry.
- Constructed of high quality UV and chemical resistant materials.

Applications

Vineyards, orchards, row crops and landscape.

Performance Chart

Pressure (psi)	Flow (gph)		
	1/2 gph	1 gph	2 gph
5	0.41	0.76	1.47
10	0.51	0.92	1.80
15	0.54	1.00	2.08
20	0.57	1.07	2.08
25	0.59	1.12	2.11
30	0.61	1.15	2.13
35	0.61	1.17	2.14
40	0.61	1.16	2.13
45	0.60	1.15	2.11
50	0.59	1.13	2.07



CETA®
PC 1/2 gph
Barb 0.16"




CETA®
PC 1 gph
Barb 0.16"



CETA®
PC 2 gph
Barb 0.16"

Flow Rate vs. Pressure

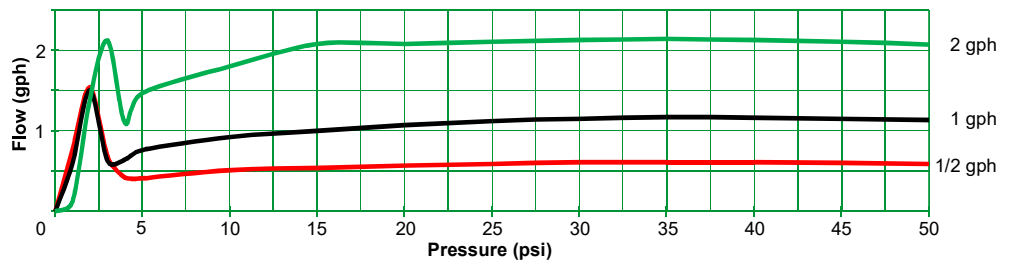

Ordering Information - CETA® PC Barb

Flow	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
1/2 gph	30425	100	50	15.6
1 gph	30445	100	50	15.6
2 gph	30485	100	50	15.6

Specifications

Dimensions Assembled		CETA® PC
HEIGHT		1.0"
WIDTH		0.8"
DEPTH		0.6"
WEIGHT (approx.)		0.06 oz
UV STABILIZED MATERIALS	BASE	polypropylene
	CAP	polypropylene
	DIAPHRAGM	silicone rubber
CONNECTION TYPE: Inlet		BARB 0.16"
Outlet		SPOUT 0.16"

