
LED Path Lights



The JS is a solid path light built to last in the harshest environments and provide efficient illumination. Available in both 1 and 3 LED with the ability to emit soft light that's functional and beautiful, the JS is an excellent path light for many applications.

JS: Path Light

| NUMBER OF LEDS: | 1 | 3 | |
|---|----------------|----------------|--|
| HALOGEN LUMEN OUTPUT EQUIVALENT: | 10 Watt | 20 Watt | |
| USEFUL LED LIFE (L70): | 50,000 hrs avg | 50,000 hrs avg | |
| INPUT VOLTAGE: | 10 to 15V | 10 to 15V | |
| VA TOTAL: (Use this number to size the transformer) | 2.4 | 4.5 | |
| WATTS USED: | 2.0 | 4.2 | |
| LUMENS PER WATT (EFFICACY) | 19.4 | 25 | |
| MAX LUMENS: | 39 | 103 | |
| CCT (Ra) | 86 | 66.6 | |





JS: Path Light

FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

| Step | Description | Code |
|------|--------------|---|
| 1 | TOP ASSEMBLY | JSLEDTA |
| 2 | TOP FINISH | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |

EXAMPLE: JSLEDTA-AB = JS Top Assembly - Antique Bronze Finish

FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

| Step | Description | Code |
|------|--------------|--|
| 1 | RISER TYPE | G |
| 2 | OPTIONAL ZD | ZD (Refer to the Luxor page in the Lighting Control section) |
| 3 | LAMP | 1LED, 3LED (50,000 avg. life hours) |
| 4 | RISER HEIGHT | 8RA, 12RA, 18RA, 24RA, 36RA (in inches) |
| 5 | FINISH | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |


EXAMPLE: G-ZD-3LED-18RA-AB = Riser Type - ZD Option - 3 LED Board - 18" Riser - Antique Bronze Finish

FIELD INSTALLED OPTIONS: Order Individually

| Marinting Outions | 45 | | 40 | |
|--|--------------------|---------------------|---------------------|--------------------|
| Mounting Options | | | | w |
| Long Slot Spike (250015840000) 2.5" x 10" Included | V | V | V | |
| Super Slot Spike (753900) 2" x 10" | | | V | - 1 |
| SuperJ-Box (<i>SJ-XX**</i>) 2.5" x 12" | ₩ | ₩ | ₩. | |
| Post Mount (<i>PM-XX**</i>) 2.5" x 13" | Long Slot Spike | Super Slot Spike | Super J-Box XX** | Post Mount XX** |

EXAMPLE: 753900 = Super Slot Spike

PHOTOMETRICS:

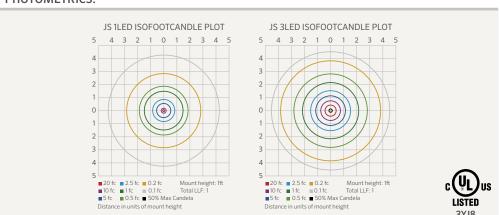

Beam angle is calculated using LM-79 method for SSL Luminaires:

METALS



AB = Antique Bronze* (On Copper/Brass)



AT = Antique Tumbled* (On Copper/Brass)



CU = Copper



NP = Nickel Plate*

POWDER COAT



WG = White Gloss



FW = Flat White



AL = Almond



BZ = Bronze Metallic



DG = Desert Granite





WI = Weathered Iron



VF = Verde Speckle



SB = Sedona Brown



FB = Flat Black

The JS includes choice of LED board, riser size and finish, 3 ft. lead wire and Long Slot Spike.



All JS path lights come standard with amber, green, blue and frosted filters

Note: Only the copper portions of the path lights are powder coated. The brass pieces remain natural.

^{**} Denotes finish code



[&]quot;Beam angle is defined as two times the $\,$ vertical angle at which the intensity is 50% of the maximum."

^{*} May require longer lead time