
## **FX**Luminaire.



The LF is our LED under-the-cap hardscape wall light. It can easily be fitted between a block wall and capstone for a neat, clean installation. Due to its modular bracket design, the LF can even be installed under railings and existing construction.

## LF: Wall Light

NUMBER OF LEDS:	1
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V
VA TOTAL: (Use this number to size the transformer)	2.4
WATTS USED:	2.0
LUMENS PER WATT (EFFICACY)	37
MAX LUMENS:	77
CCT (Ra)	81.6






## **FACTORY INSTALLED OPTIONS:** Order 1 + 2 (optional) + 3 + 4

Step	Description	Code
1	FIXTURE	LF
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	FINISH	AB*, AT*, CU, BS, SS, WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: LF-ZD-1LED-SS = LF - ZD Option - 1LED Board - Stainless Steel Finish

## **PHOTOMETRICS:**

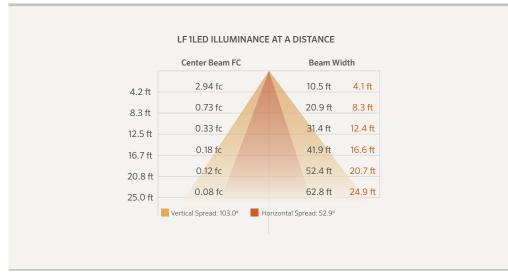

Beam angle is calculated using LM-79 method for SSL Luminaires:

METAL	.s
	<b>AB</b> = Antique Bronze* (On Copper)
	<b>AB</b> = Antique Bronze* (On Brass)
	AT = Antique Tumbled* (On Copper)
	AT = Antique Tumbled* (On Brass)
	<b>CU</b> = Copper
	<b>BS</b> = Natural Brass
	<b>SS</b> = Stainless Steel
DOWDI	
POWDI	ER COAT
POWDI	<b>WG</b> = White Gloss
Powdi	
Powble	<b>WG</b> = White Gloss
Powble	<b>WG</b> = White Gloss <b>FW</b> = Flat White
Powble	WG = White Gloss  FW = Flat White  AL = Almond
Powble	WG = White Gloss  FW = Flat White  AL = Almond  BZ = Bronze Metallic
	<ul> <li>WG = White Gloss</li> <li>FW = Flat White</li> <li>AL = Almond</li> <li>BZ = Bronze Metallic</li> <li>DG = Desert Granite</li> </ul>

The LF includes a 1LED board, choice of faceplate finish, 9 ft lead wire.

**FB** = Flat Black





All LF wall lights come standard with amber, and frosted filters

\* May require longer lead time

 $<sup>&</sup>quot;Beam\ angle\ is\ defined\ as\ two\ times\ the\ vertical\ angle\ at\ which\ the\ intensity\ is\ 50\%\ of\ the\ maximum."$