



HENDRICKSON

PR5500 Preset Pressure Regulator

- Wide range of operation
1/3 to 12 GPM (20 to 720 gallons per hour.)
- 10, 15, 20, 25, 30, 35 and 50 PSI preset pressures available.
- High-strength ABS construction.
- Thread options available for all installations.

Applications

- Turf irrigation systems
- Drip and low flow irrigation systems
- Center pivot spray/sprinklers
- Commercial/Residential
- Growers/Greenhouses

The PR5500 offers exceptional outlet pressure control to provide consistent performance from 20 to 720 gallons per hour. The PR5500 offers the widest operation range available. The PR5500 effectively regulates at the following pressures: 10, 15, 20, 25, 30, 35, and 50 PSI, all preset to exacting factory specifications.

The unique design of the PR5500 utilizes a minimum of moving parts in a sophisticated diaphragm design that regulates itself in reaction to the overall system back pressure. The PR5500 is constructed of high strength ABS plastic and all joints are sonic welded into a tamper proof and impact resistant container. A variety of thread options are available for all installation specifications.

All Hendrickson Bros. irrigation products are produced from the highest quality materials. Quality assurance testing for overall quality, performance, and durability are ongoing at Hendrickson Bros.



HENDRICKSON BROS.


2931 Rimpau Avenue, Corona, CA 92881-3625
(951) 737-6822 • Fax (951) 737-9151
www.hendricksonbros.com

©1994 Hendrickson Bros.


MADE IN USA

PR5500 Preset Pressure Regulator


PR5510 Performance Data

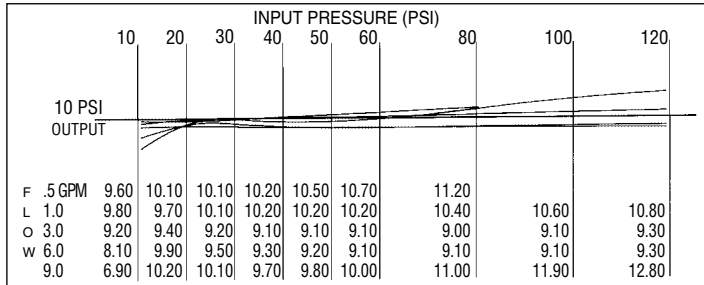


PR5525 Performance Data

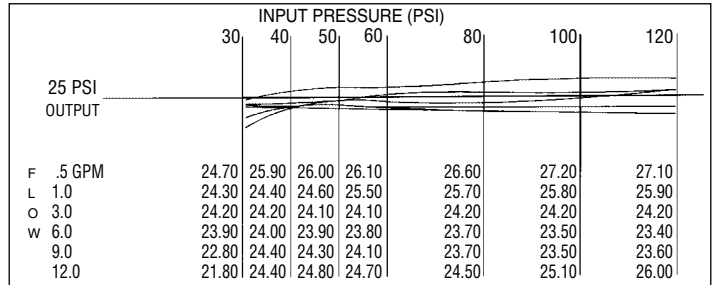


PR5515 Performance Data

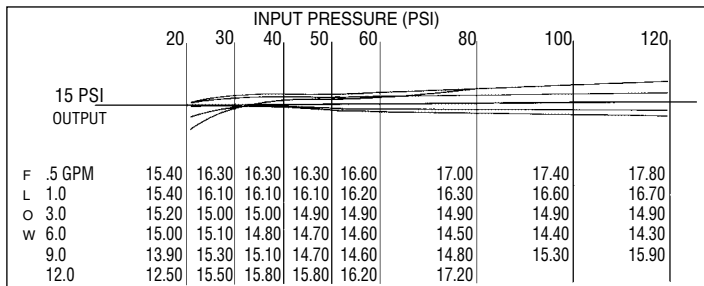


PR5530 Performance Data

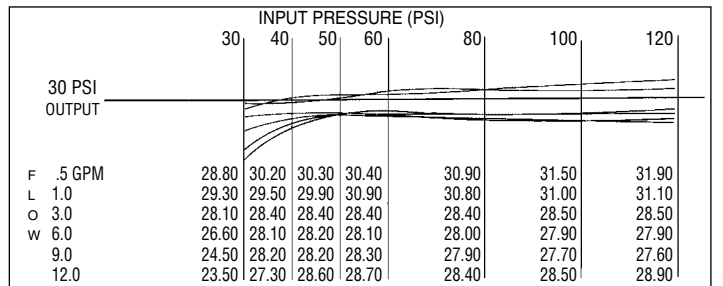

PR5520 Performance Data

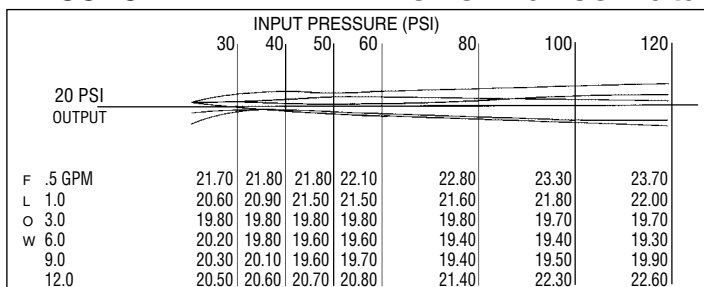

PR5535 Performance Data

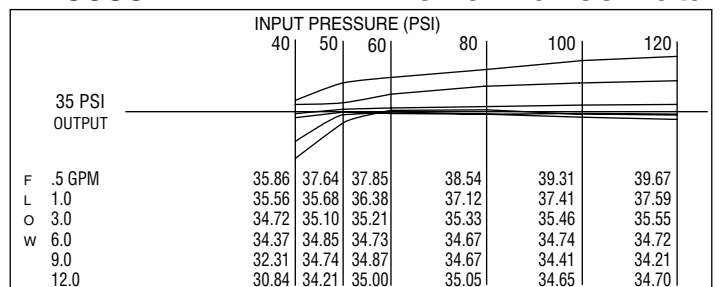


Specifications

Materials:

Body	Chemical resistant ABS Plastic
Diaphragm	EPDM
Spring	Stainless Steel
Inlet	3/4" FIPT (standard)*
Outlet	3/4" MIPT (standard)*
Overall Length	3.50"
Outside Diameter	1.625"
Operating Pressure Range	0-120 PSI

*See price list for other inlet/outlet thread configurations.

PR5550 Performance Data

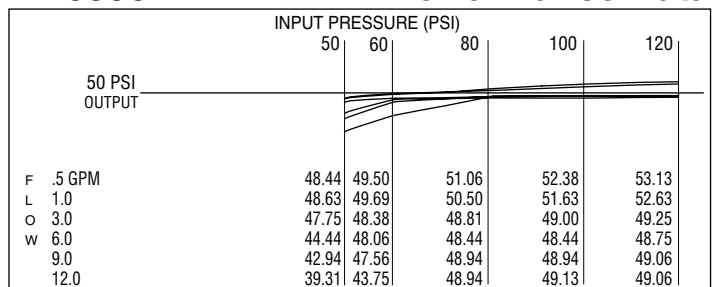

2931 Rimpau Avenue, Corona, CA 92881-3625
 (951) 737-6822 Fax (951) 737-9151
 www.hendricksonbros.com

©1994 Hendrickson Bros.

MADE IN USA