



A Pressure Compensating drip emitter that provides a fixed diameter over a wide range of operating pressures. Gentle stream action with uniform application and coverage for all emitters on the same supply tube.

### Features

- Pressure Compensating operation maintains diameter of throw over a wide range of inlet pressures.
- Take-apart for easy inspection and cleaning.
- Colored cap for easy identification.
- Patented functionality.
- UV stabilized materials for long life.

### Applications


*Pots, planter boxes, balcony, patio and landscape applications.*

### Performance Chart

Pressure (psi)	360° ✱	
	Flow (gph)	Diameter (in)
15	6.6	10.2
20	7.5	11.8
25	8.1	14.3
30	8.8	14.0
35	9.3	14.6
40	9.7	15.0
45	10.1	15.5
50	10.6	15.7



### Flow Rate vs. Pressure

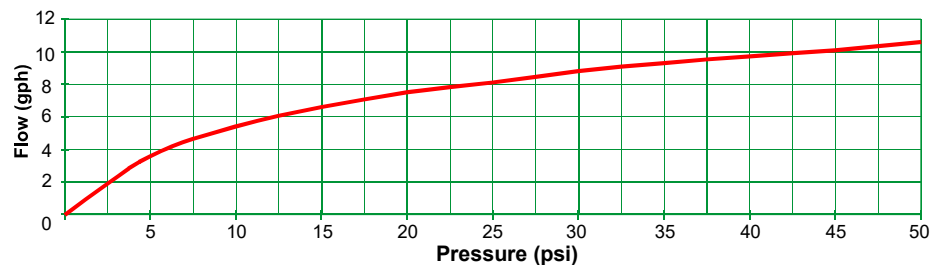

Shrubbler® 360° PC  
Spike with 0.16" Inlet

### Ordering Information - Shrubbler® 360° PC

Description	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
Barb 0.16"	31685	100	50	20.4
Spike	31695	25	50	15.9

### Specifications

Dimensions Assembled		Barb	Spike
HEIGHT		1.0"	5.3"
WIDTH		0.8"	0.6"
DIAMETER		0.6"	1.0"
WEIGHT (approx)		0.06 oz	0.19 oz
UV STABILIZED MATERIAL	BASE	polypropylene	polypropylene
	CAP	polypropylene	polypropylene
	DIAPHRAGM	silicone	silicone
BASE/CONNECTION TYPE: Inlet		BARB 0.16"	BARB 0.16"